




RVT Add-on Deliverables

RVT Add-on

The RVT standalone offers a comprehensive starting point containing a model, floor plans & optional ceiling plans. The RVT Add-on is only available in Imperial Units, available for any property under 10,000 SF (under 150 scans) and Premium Only (Contact the Support Team for larger submissions). The following items are available for the RVT standalone:

- **Point Cloud:** In the form of a DXF (.dxf) file, Point Cloud is available against the wall segments drawn for the iGUIDE Virtual Tour.
 - Provided by Default.
- **Floor Plans:** 2D AutoCAD 2018 drawing file (.dwg).
 - Provided by Default.
- **Ceiling Plans:** 2D AutoCAD 2018 drawing file (.dwg).
 - Provided as an Optional Add-on.
- **Model:** 3D Revit 2020 file (.rvt).
 - Provided by Default.
- **Delivery Time:** RVT Files are available within forty-eight to seventy-two hours* after the iGUIDE is published for properties under 10,000 sq ft. Please contact the Support Team for properties over 10,000 sq ft or over 150 scans. Delivery times will vary due to property size and complexity.

* RVT model delivery time is dependent on property size, complexity and Add-ons which may exceed 72 hours. Excluding Saturdays & Sundays, holidays, and outside office hours (Mon-Fri 9 am-5 pm ET).

	Premium		
Included	<ul style="list-style-type: none"> ✓ Point Cloud (.dxf) ✓ Floor Plans (.dwg) ✓ Model (.rvt) 		
Optional	<ul style="list-style-type: none"> ✓ Ceiling Plans (.dwg) 		
Not Included	<ul style="list-style-type: none"> ✗ Mechanical/Electrical/Plumbing Plans ✗ Life Safety/Building Code Plans ✗ Building Sections/Wall Sections/Detail Sections ✗ Site/Grading/Landscape Plans ✗ Window/Door Schedules 		
			
*Deliverables are dependent on successfully meeting Capture Requirements.			

Point Cloud Deliverables

The Point Cloud is Delivered within the DXF file, "Metric DXF". The DXF does not contain annotative text or dimensions of any kind. See [iGUIDE DXF Information](#) via the iGUIDE Help Center. *

* The DXF is an automatically generated copy of the iGUIDE Virtual Tour floor plan, whereas the DWG is manually drafted, and to different specifications. The DXF and DWG will not be 1 for 1.

DXF is a Drawing eXchange Format created by Autodesk for exchanging data between various CAD packages. DXF files can be imported into most CAD software, not only Autodesk software (e.g. AutoCAD, Revit). DXF format is publicly documented, as opposed to Autodesk's proprietary DWG format.

DXF files only store numerical coordinates, but do not store measurement units for those coordinates. iGUIDE DXF files store all coordinates in **millimetres**, which is signified by the Metric DXF naming. Incidentally, if the coordinates in the iGUIDE DXF file were stored in metres, the files would still be called Metric.

Our system does not provide DXFs in imperial units, such as inches or feet. However, when importing a DXF file into CAD software, you can apply any scale factor of your choice, depending on which units you need to work with in the CAD software. For example, to work in inches, you would choose the scale of 25.4 and to work in metres the scale of 1000. This selection can usually be made in the import dialogue.

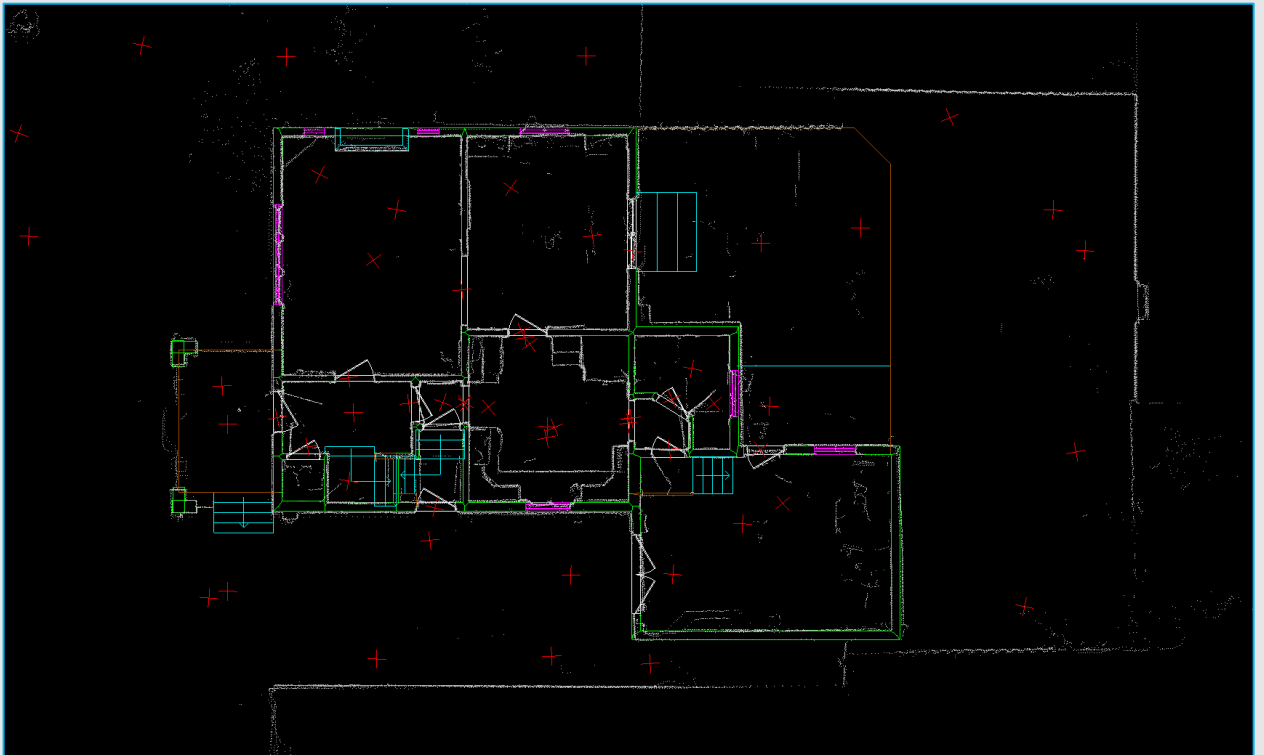


Figure # 1 - Standard Residential DXF File Output



Figure # 2 - Standard Commercial DXF File Output

Floor Plan Deliverables

File Format: 2D AutoCAD 2018 drawing file (.dwg).

Interior Walls: Primarily drawn to follow standard dimensional lumber sizes. The most common interior wall thickness values will be 4 ½" (114mm) & 6 ½" (165mm).

- Wall Thicknesses: Drawn to follow ½" (13mm) increments.
- Wall Placements: walls will be placed so room dimensions are to the nearest ¼".
- Half-walls will be drafted as non-hatched walls to indicate non-full height walls.

Exterior Walls: Wall widths provided by an operator and ground level point cloud capture will be used as a starting point. The exterior wall width will be modified to adhere to standard dimensional lumber sizes, factoring in common brick or siding construction assembly thicknesses insuring reliable floor to floor alignment.

- Wall Thickness: Without supporting exterior data captured by an iGUIDE camera system, the exterior wall widths will be massaged to support vertically aligning floors based on interior point cloud data. Drawn to follow ½" (13mm) increments.

Structural Elements: Features such as fireplaces and columns each have different representations.

- Columns: Solid objects with standard shapes represented within the Interior of the property.
- Fireplaces: Single medium line types outlining the extent of the fireplace with a label.

Floor to Floor Alignment: Multi story properties will be aligned along common interior walls such as stairs. Exterior walls (as mentioned above) will be adjusted based on data interpretation, ground level capture and standard dimensional wall assemblies.

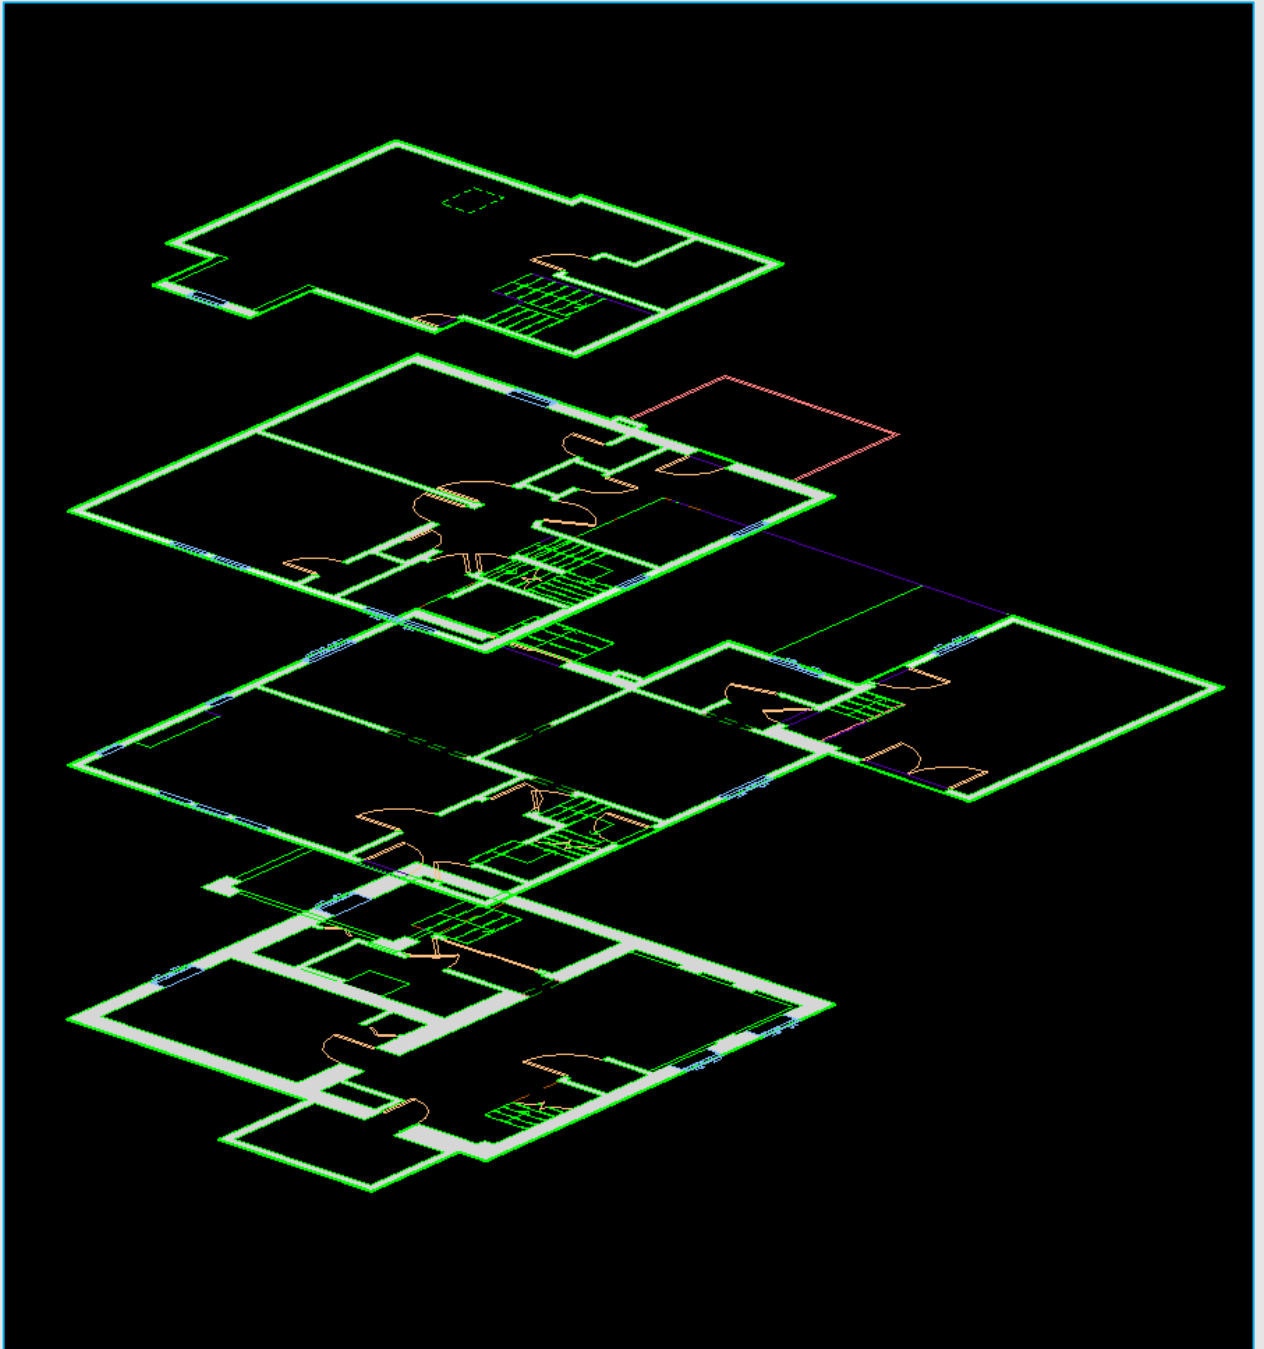


Figure # 3 - Floor to Floor Alignment

Doors: Represented using a block, with all the available door types featured in iGUIDEs. Doors are measured to the nearest 2" (51mm) intervals. Door widths are measured by the door opening width, measured from inside frame to inside frame.

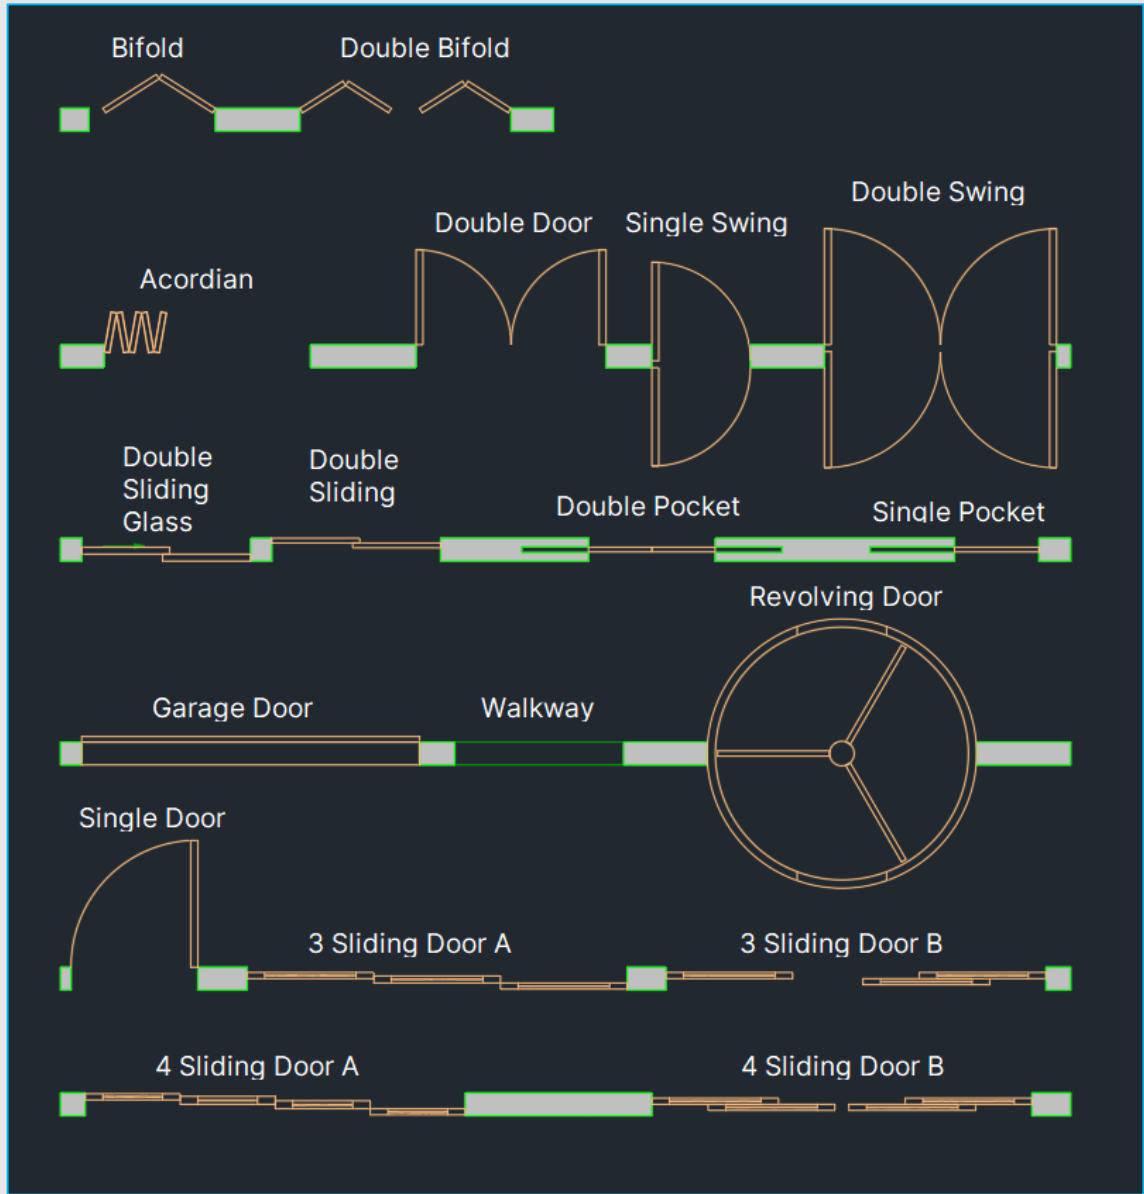


Figure # 4 - Door Styles/Types

Windows: Represented using a block, with seven available types shown below. Windows are measured to the nearest 1" increments. Window widths are set to include the frame surrounding the glazing.

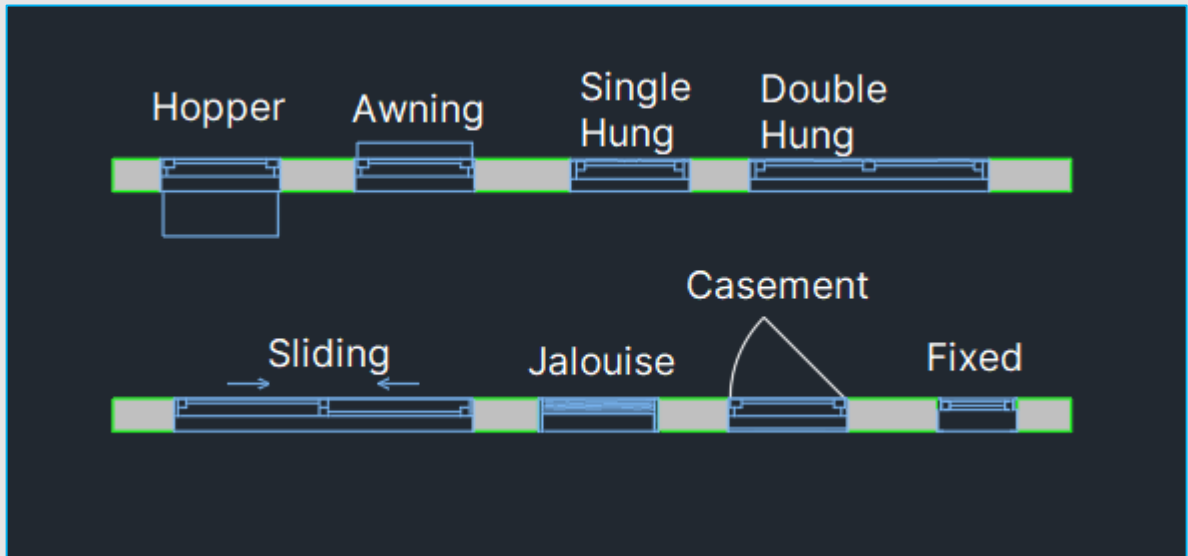


Figure # 5 - Window Styles/Types

Curtain Walls: Represented using a wall type, with a default 2.5x2.5 inch (63.5 mm x 63.5 mm) mullions. Curtain Walls are measured to the nearest 1" (25mm) increments.

Stairs: Represented with single lines indicating the steps going up and down. Risers are cosmetically represented and may not reflect the true value. Each set of stairs will have the corresponding label block.

- Stairs visible from four feet above the floor level down are not shown and have a break line. The four-foot cutline may be adjusted by drafters to include more of the stairs to match the iGUIDE.

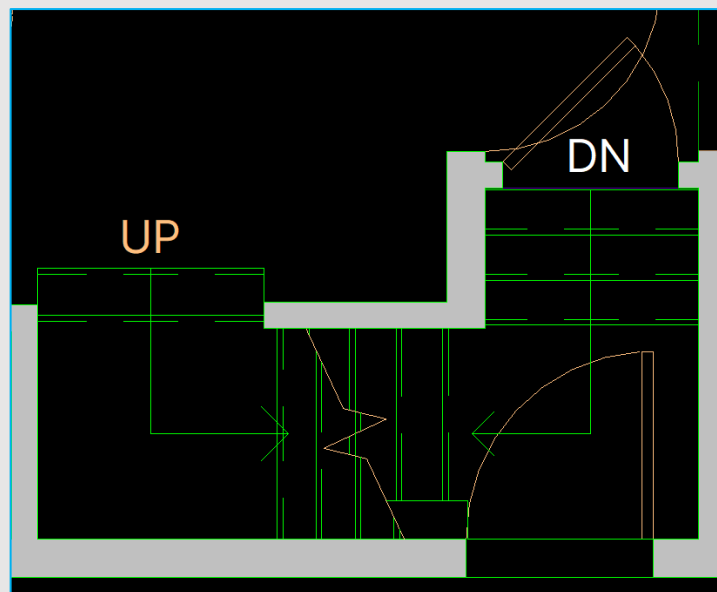


Figure # 6 - Stair Representation

Exterior Features: Exterior features such as porches, decks and balconies will be represented with single lines indicating where they are located.

- Exterior Stairs/Ramps: Exterior Stairs and/or ramps will be represented on the Floor Plan.
- Exterior Columns: External Columns that support the main structure will be represented on the Floor Plan.

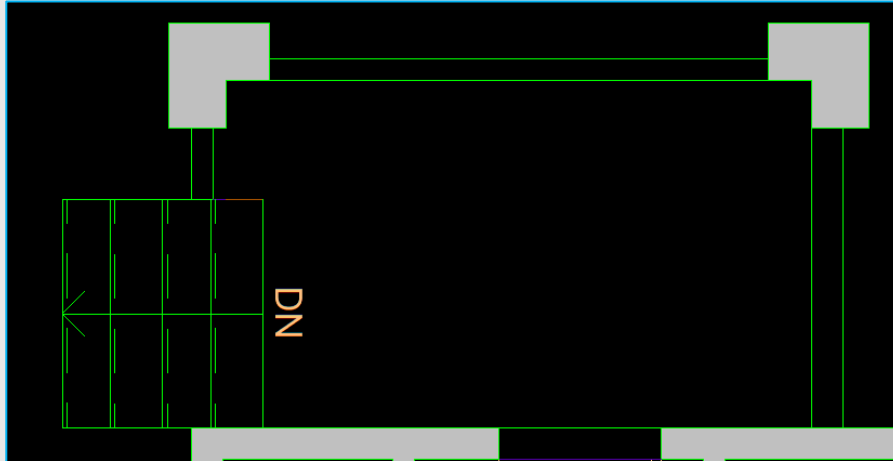


Figure # 7 - External Porch/Deck with Columns

AIA Layers: All components created are set under the specific layer determined by the AIA (American Institute of Architects) Layer Standard.

Room Labels*: Annotative room labels with varying sizes used to clearly indicate specific rooms.

Room Boundaries: Complete polylines outlining edges of rooms primarily used for determining the area of the room.

- Room Boundaries (polylines) are all turned off by default.

Room Areas*:

- Room Areas are indicated for Major Rooms such as bedrooms, kitchens, living rooms, etc.
- Room Areas are not indicated for Minor Rooms such as hallways, closets, etc.
- Room Areas for spaces such as voids and stairs are not indicated.

Room Measurements*:

- Not in the form of a Dimension String, but in the form of a label indicating the longest Width & Length of a room.
- Room measurements are taken paint to paint or interior face of wall to interior face of wall.
- Room measurements are shown for major rooms, similar to what's displayed on the iGUIDE.

Room Heights*:

- Flat Ceilings will contain a single vertical dimension to the nearest 1" (25mm).
- Sloped, Vaulted or Tray Ceilings will be denoted as variable (VAR.).

*Room Dimensions may differ from the DXF & the iGUIDE Virtual Tour.

*All annotations listed above are dependent on the size of the space. If the room is too congested or small, some or all annotations will be omitted. Generally, annotations are represented in a similar fashion as the iGUIDE Floor Plan.

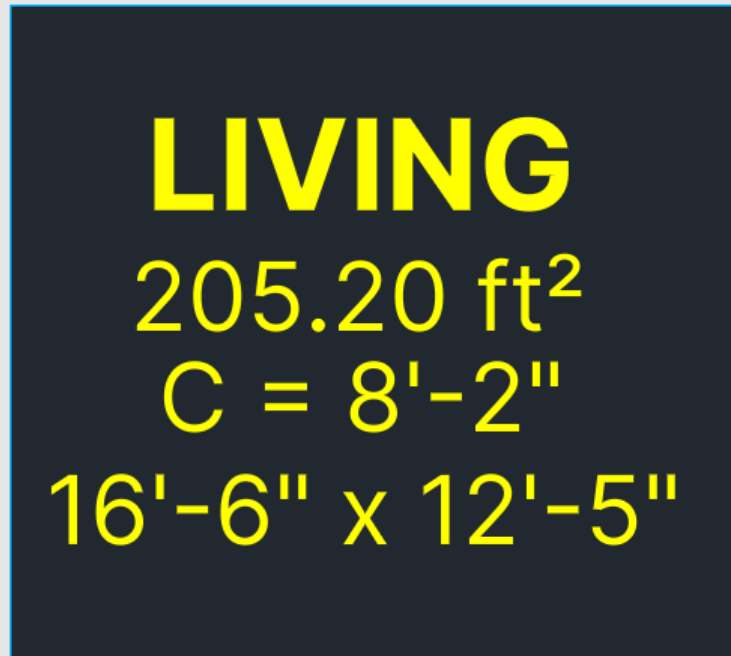


Figure # 8 - Room Annotations

Premium Objects: Premium objects, millwork, and counters. Outlined with a solid thin thickness line if below four feet from the floor level, and a dashed thin thickness line if under counter, like the iGUIDE.

- Kitchen: Objects such as Fridges, Stoves, Dishwashers & Sinks will be represented.
- Bathroom: Objects such as Toilets, Sinks, Showers & Tubs will be represented.
- Laundry: Objects such as Washers & Dryer will be represented.
- Mechanical: Objects such as a Furnace, Water Heater & Hydro Meters will be represented.
- Commercial/Retail: Objects such as Cubicles, Store Shelving & Janitorial Sinks will be represented.



Figure # 9 – Misc. Premium Areas

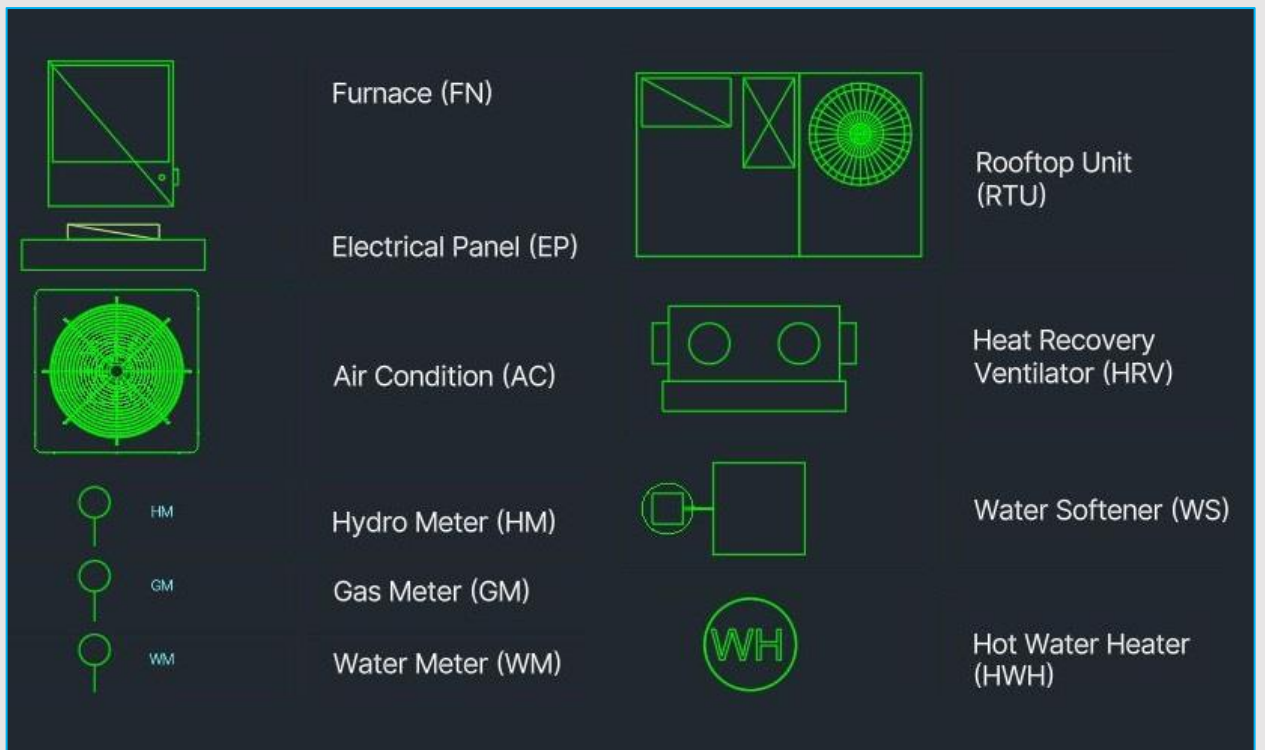


Figure # 10 - Mechanical Objects for Premium Floor Plans

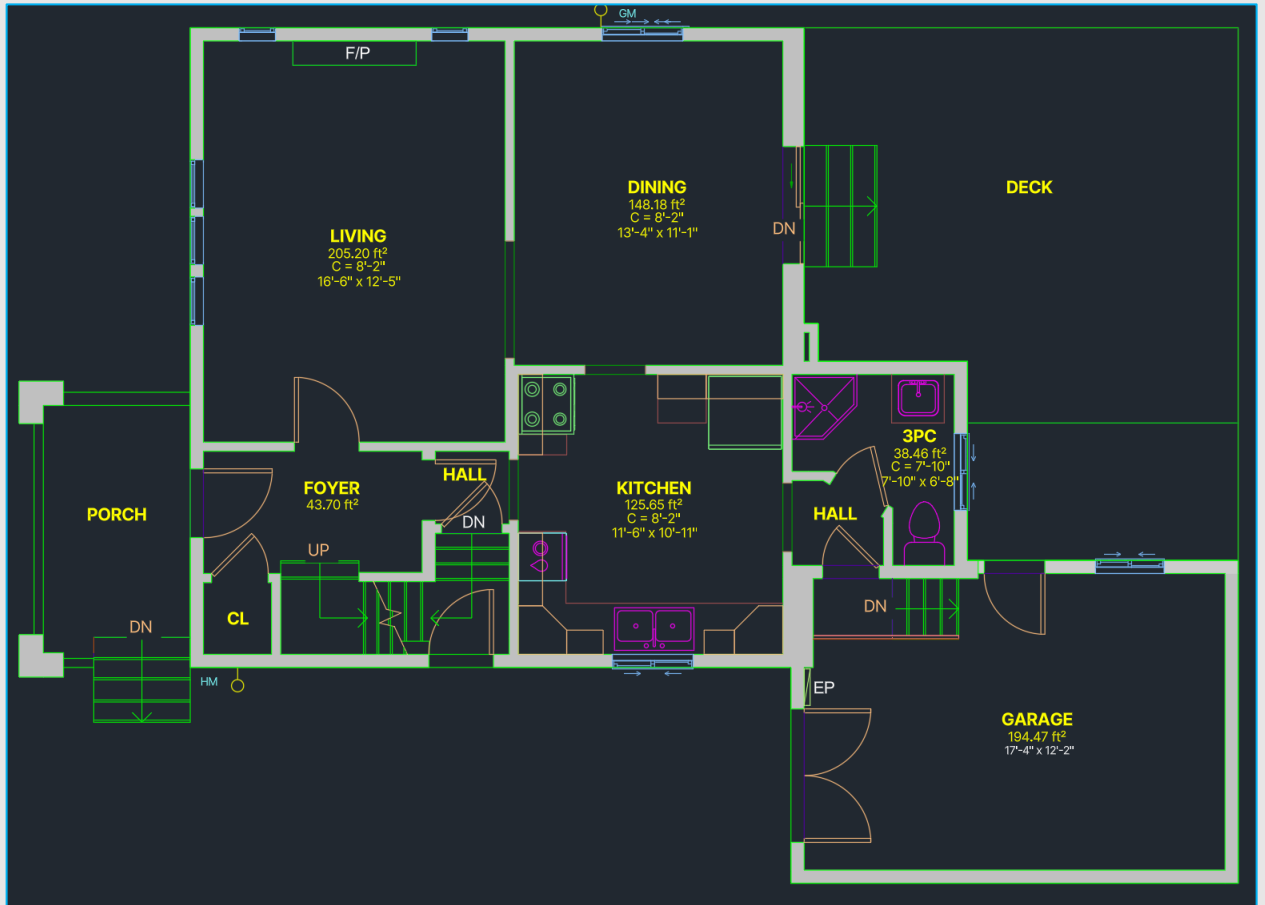


Figure # 11 - Premium Residential DWG Floor Plan Output

Floor Plan Views

The Floor Plan deliverable matches the DWG's Premium Floor Plan Output and in Revit will appear as below:

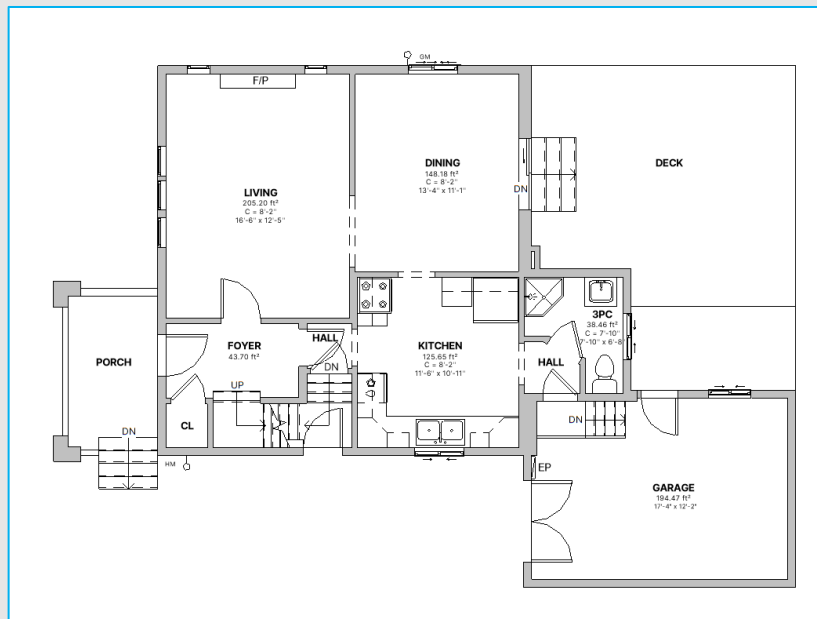


Figure # 12 - Floor Plan View Within Revit

Floor Plan Comparison Matrix

	Premium
Included	<ul style="list-style-type: none"> ✓ AutoCAD 2018 Drawing File ✓ Wall Types & Placement ✓ Walls Sizes at ½" (10mm/13mm) Tolerances ✓ Wall Placement at ¼" (5mm/6.5mm) Tolerances ✓ Door Types & Placement ✓ Window Types & Placement ✓ Stairs ✓ Structural Elements (Columns, Fireplaces) ✓ AIA Layer Format ✓ Floor to Floor Alignment ✓ External Features (Decks, Patios, Porches) ✓ Room Labels ✓ Room Area ✓ Room Measurements ✓ Ceiling Heights (Flat) ✓ Premium Objects
Not Included	<ul style="list-style-type: none"> ✗ 3D AutoCAD/3D Representation ✗ Ready to Plot Sheets ✗ Wall Assembly Details ✗ Floor Material ✗ Point Cloud ✗ Project/Survey Coordinates ✗ Complex Ceiling Heights/Representation (Sloped, Vaulted or Tray) ✗ Structural Elements (Beams, Lintels, Joists)
<p>*Deliverables are dependent on successfully meeting Capture Requirements.</p>	

Reflected Ceiling Plan Deliverables

File Format: 2D AutoCAD 2018 drawing file (.dwg).

Walls: Walls provided on the Ceiling Plan are a copy of the Floor Plan.

Doors/Windows: Doors & Windows contained within the walls of the floor plan are only visible on the Ceiling Plan if they exceed the cut plane.

- Skylights: Similar to windows provided on the floor plan, skylights will be represented on the ceiling plan to the nearest 1" (25mm).

Ceiling Types: Acoustic panels will be represented with an appropriate grid relative to the visuals provided by an iGUIDE Camera System. Drywall ceilings will not appear with any type of hatch pattern. Open ceilings (exposed sub-floor or underside of steel decking) will not be represented with any hatch.

- Open/Exposed Ceilings: Any structural elements such as beams, open web steel joists, wood joists, etc. will not be represented.
- Mouldings and Ornaments: No specialty molding or trims will be represented on the ceiling plan.
- Suspended Architectural Panels: Suspended panels will be represented in an appropriate, approximate location.

Complex Ceilings*: Bulkheads, tray & cove ceilings are represented as a hidden line boundary.

Sloped/Vaulted Ceilings*: A hidden line represents the peak of a vaulted ceiling.

Roof/Attic Access: Represented as a block to indicate the location of or access to the Attic of a Residential Property or Roof of a Commercial Property.

Lighting Elements*: Basic representation of recessed lighting, ceiling mounted lighting, pendant/suspended lighting, wall light, recessed fluorescent lighting, suspended fluorescent lighting, ceiling mounted fluorescent, lighting track lighting, linear strip lighting & ceiling fans.










	Recessed Light
	Ceiling Mounted Light
	Wall light
	Pendant/Suspended Light
	Suspended Fluorescent Light
	Recessed Fluorescent Suspended Light
	Ceiling Mounted Fluorescent Light
	Track Light
	Linear Strip Light

Figure # 13 - Lighting Elements Represented on the DWG Ceiling Plan

Safety Elements*: Emergency Lighting (wall mounted), emergency exit lighting (ceiling mounted), emergency lighting (ceiling mounted), emergency battery units, smoke detectors, carbon monoxide detectors & fire alarm annunciators.

*Life Safety Plans are not provided. Only basic lighting elements that relate to life safety features. This offering does not suffice as a Life Safety Plan.









	Emergency Light – Wall Mounted
	Emergency Light – Ceiling Mounted with Arrow
	Emergency Light – Ceiling Mounted
	Emergency Battery Unit
	Smoke Detector
	Carbon Monoxide Detector
	Speaker
	Fire Alarm Annunciator

Figure # 14 - Safety Elements Represented on the DWG Ceiling Plan

Mechanical Elements*: Surface level air diffusers, air vents, exhaust fans, air grills, ceiling fans & speakers.

- Open/Exposed Mechanical: Any mechanical systems such as ducts will not be represented in open/exposed ceiling areas.

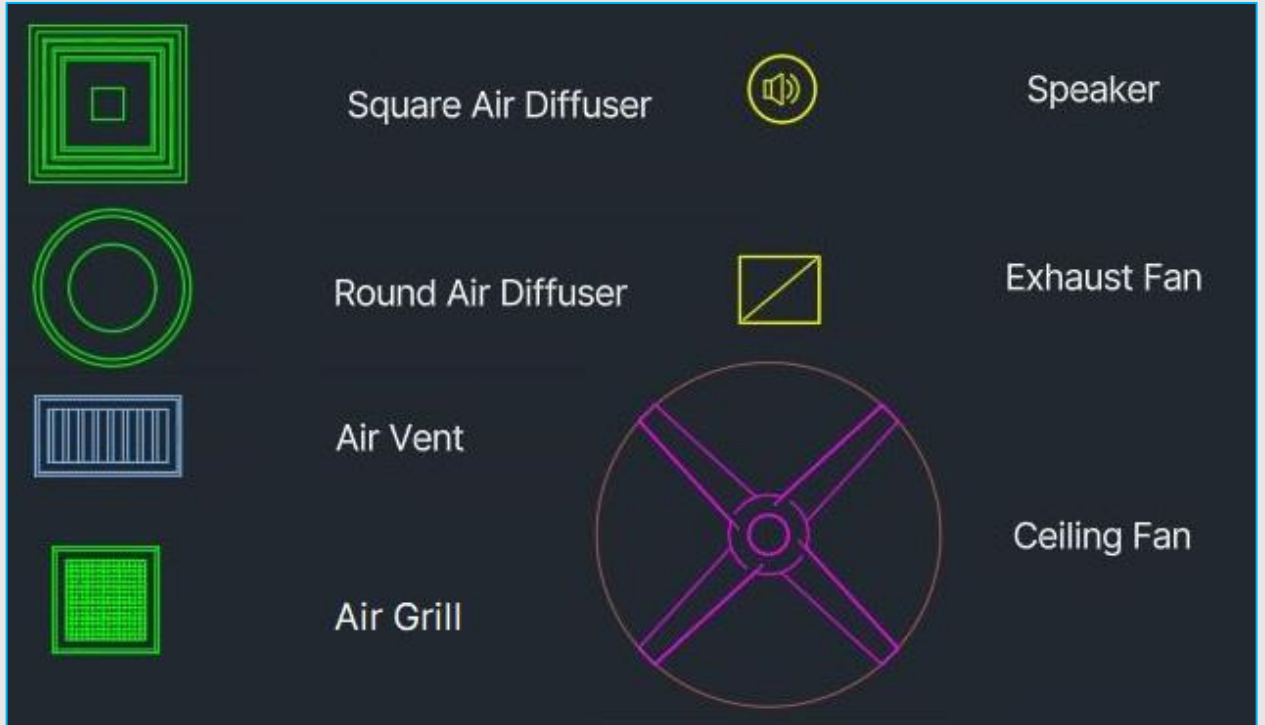


Figure # 15 - Mechanical Elements Represented on the DWG Ceiling Plan



Figure # 16 - Residential Premium Ceiling Plan DWG Output

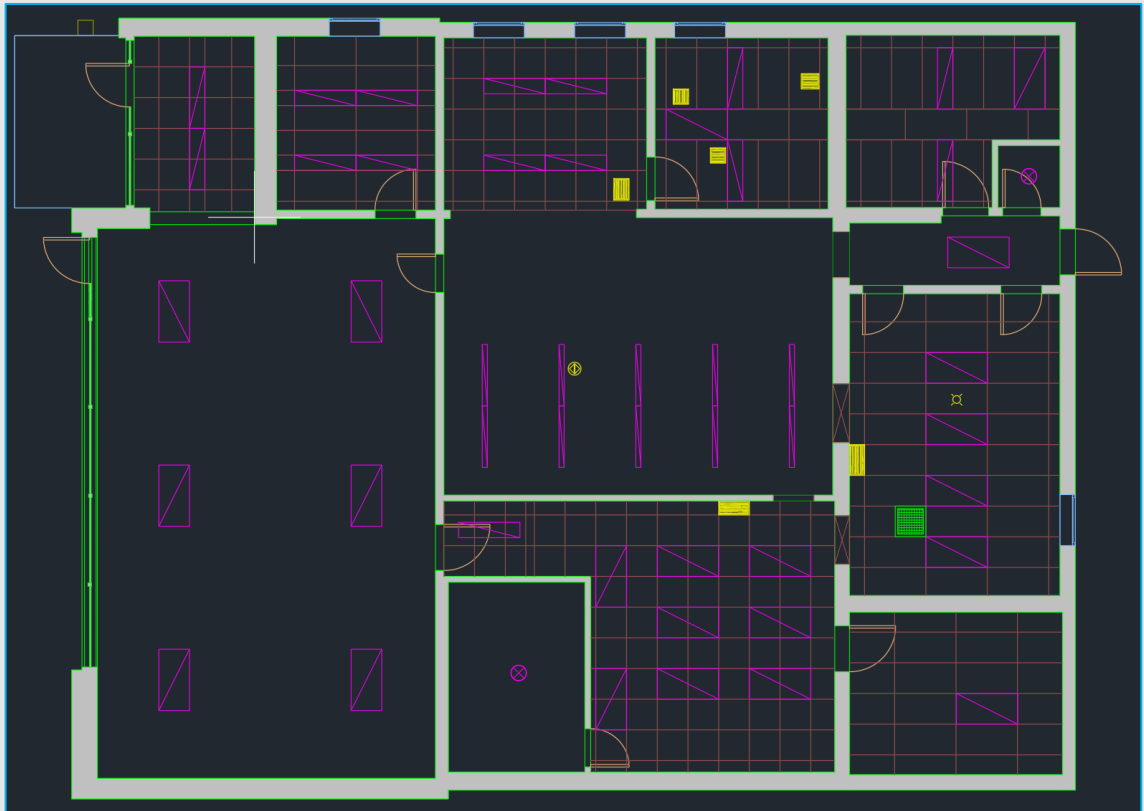


Figure # 17 - Commercial Premium Ceiling Plan DWG Output

Ceiling Plan Views

The Ceiling Plan deliverable matches the DWG's Ceiling Plan Output and in Revit will appear as below:



Figure # 18 - Ceiling Plan Output as per View in Revit

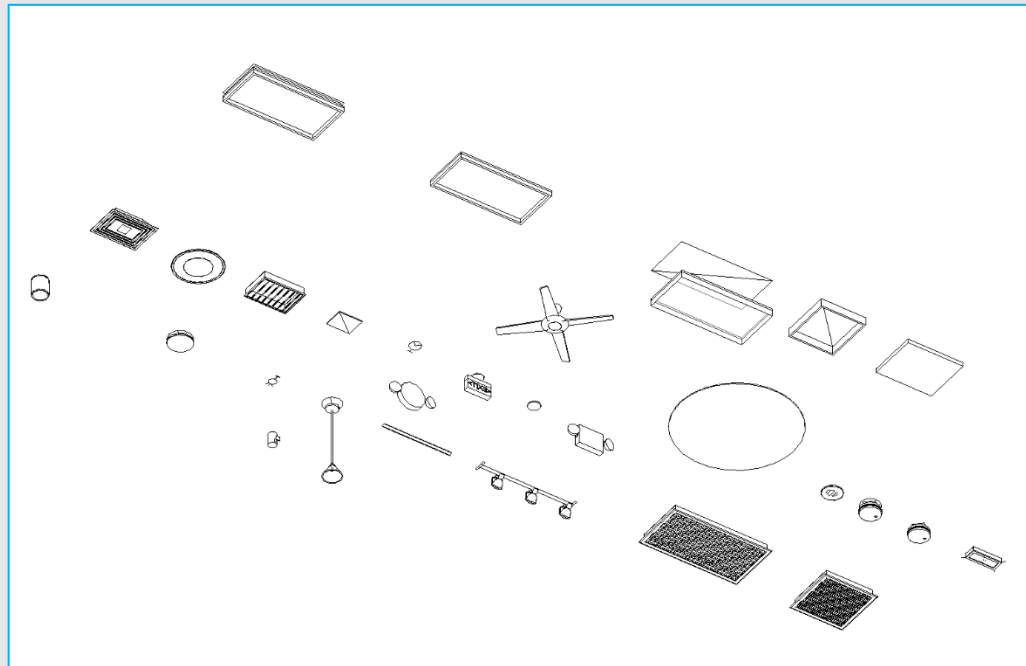


Figure # 19 - Ceiling Objects as Viewed in 3D

Reflected ceiling plan (RCP) drawings are an essential tool in architecture and construction, offering a detailed depiction of the ceiling layout by reflecting it as if seen from below. Unlike traditional ceiling plans, RCP drawings incorporate additional information such as lighting fixtures, HVAC, and other ceiling-mounted or surface level elements.

These drawings typically rely on a combination of floor level measurements and 360-degree images to create a reliable representation. Floor level measurements provide the foundation for the layout, while 360-degree images capture a comprehensive view of the ceiling space from various angles. By integrating these two sources of information via an iGUIDE Camera System, RCP drawings aim to provide a more complete and reliable depiction of the ceiling layout.

While RCP drawings are based on measurements and images, it's important to recognize that they are still approximate representations. Factors such as perspective distortion, variations in ceiling height, ceilings exceeding one storey in height (14 feet, 4.3 meters) and the complexity of ceiling elements can affect the accuracy of the drawings to some extent. All room dimensions and floor areas must be considered approximate and are subject to independent verification.

Reflected Ceiling Plan Comparison Matrix

	Premium
Included	<ul style="list-style-type: none"> ✓ Ceiling Types ✓ Skylights ✓ Roof Access Hatches/ Attic Access Hatches ✓ Bulkheads ✓ Standard List Deliverables ✓ Premium Objects ✓ Surface Level Lighting Fixtures ✓ Surface Level Safety Features (Related to Lighting) ✓ Surface Level Mechanical Features
Not Included	<ul style="list-style-type: none"> ✗ Annotations, Measurements or Ceiling Heights ✗ Life Safety Plan ✗ Sprinkler Systems & Routing ✗ Mechanical Systems & Routing ✗ Electrical Systems & Routing ✗ Custom Lighting Fixtures ✗ Structure
<p>*Deliverables are dependent on successfully meeting Capture Requirements.</p> <p>*Ceiling Plan Deliverable is available as an Add-on.</p>	

Model Deliverables

File Format: 3D 2020 Revit file (.rvt).

Point Cloud: The 2D DXF & *Point Cloud* is available within the Model as a “symbol” and hidden by default. The DXF layer will be represented at an arbitrary 4feet above the floor level per level.

Families: iGUIDE default proprietary families, with appropriate dimensions for easy modification or replacing with other families.

Levels*: Set to the highest measured height per floor, plus a one-foot space between top of level and level of floor above to accommodate floor assembly, modeled with a default two-inch floor.

- Backsplits: Split levels greater than a four-foot difference will be separated onto their own floors.
- No separation of spaces will be shown when a part of the building is located on the same level but separated in the iGUIDE.
- Detached structures attached with a roof would be shown on the appropriate floor plan.

*Spacing between levels may differ from the default 1'-0" based on additional capture requirements.

Interior Walls: Primarily modeled to follow standard dimensional lumber sizes. The most common interior wall thickness values will be 4 ½" (114mm) & 6 ½" (165mm).

- Wall Thicknesses: represented with a generic material set to ½" (13mm) intervals.
- Wall Placements: walls will be placed so room dimensions are to the nearest ¼" (6.5mm).
- Wall Heights: all represented at the highest elevation point of the floor.
 - Walls that do not reach the ceiling level will be represented as reliably as possible with the data available.
 - Half-walls will be set to a default of 4'-0" (1220mm).

Exterior Walls: Wall widths provided by an operator and ground level point cloud capture will be used as a starting point. The exterior wall width will be modified to adhere to standard dimensional lumber sizes, factoring in common brick or siding construction assembly thicknesses.

- Wall Thickness: Without supporting exterior data captured by an iGUIDE camera system, the exterior wall widths will be massaged to support vertically aligning floors based on interior point cloud data. Represented with a generic material set to ½" intervals.

Curtain Walls: Curved or straight curtain wall systems will be shown as a Stacked Curtain Wall.

Structural Elements: Features such as fireplaces and columns each have different representations.

- Columns: Solid objects with standard shapes to match the representation in iGUIDEs.

- **Fireplaces*:** Single block outlining the extents of the fireplace with a label.
*Fireplaces are represented as rectangular or triangular.

Floor to Floor Alignment: Multi story properties will be aligned along common interior walls such as stairs. Exterior walls (as mentioned above) will be adjusted based on data interpretation, ground level capture and standard dimensional wall assemblies.

Doors: Door dimensions are represented to the nearest 2" (51mm) increment.

- **Door Type:** Door types accurately match the type represented in an iGUIDE.
- **Door Widths:** Represented to the nearest 2" (51mm) increment.
- **Door Heights:** Represented to the nearest 2" (51mm) increment.

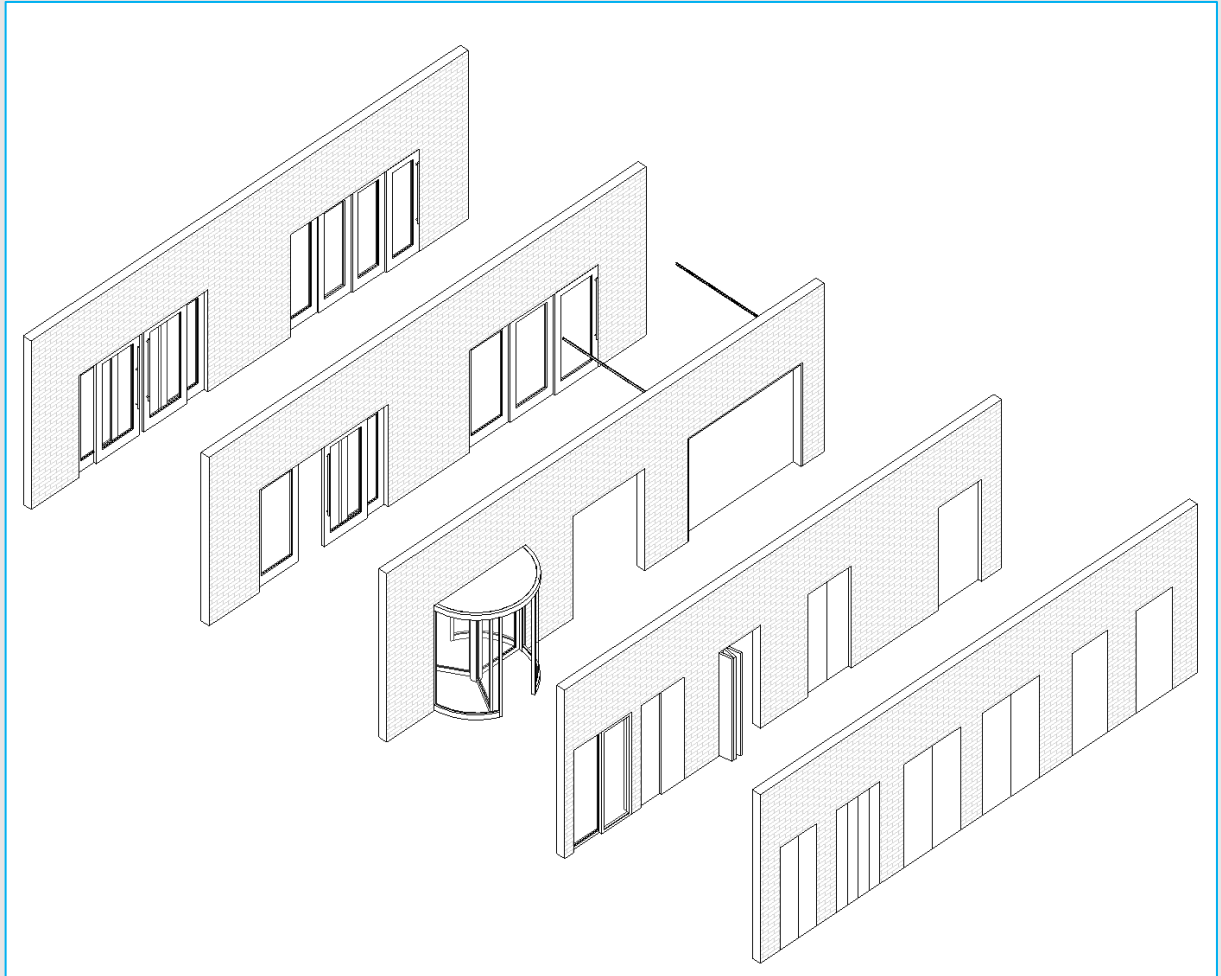


Figure # 20 - Door Types 3D View

Wall Openings: Wall openings are represented to the nearest 1" (25mm) increment.

- **Dimensions:** Height from the floor as well as the opening width & height will be set to the nearest 1" (25mm) increment.
- **Pass-Throughs:** Openings in the wall that can either be walked through or if the base is off the floor, used for visibility or passing items through.

Windows: Windows are represented to the nearest 1" (25mm) increment.

- Window Type: Window types can be represented as Double-Hung, Single Hung, Louvers/Jalousie, Awning, Casement, Fixed, Sliding & Hopper.
- Window Shape: Square, Rectangular, Circular, Semi-Circular, Triangular.
- Window Width: Represented to the nearest 1" (25mm) increment.
- Window Height: Represented to the nearest 1" (25mm) increment.
- Window Elevation: Represented to the nearest 1" (25mm) increment.

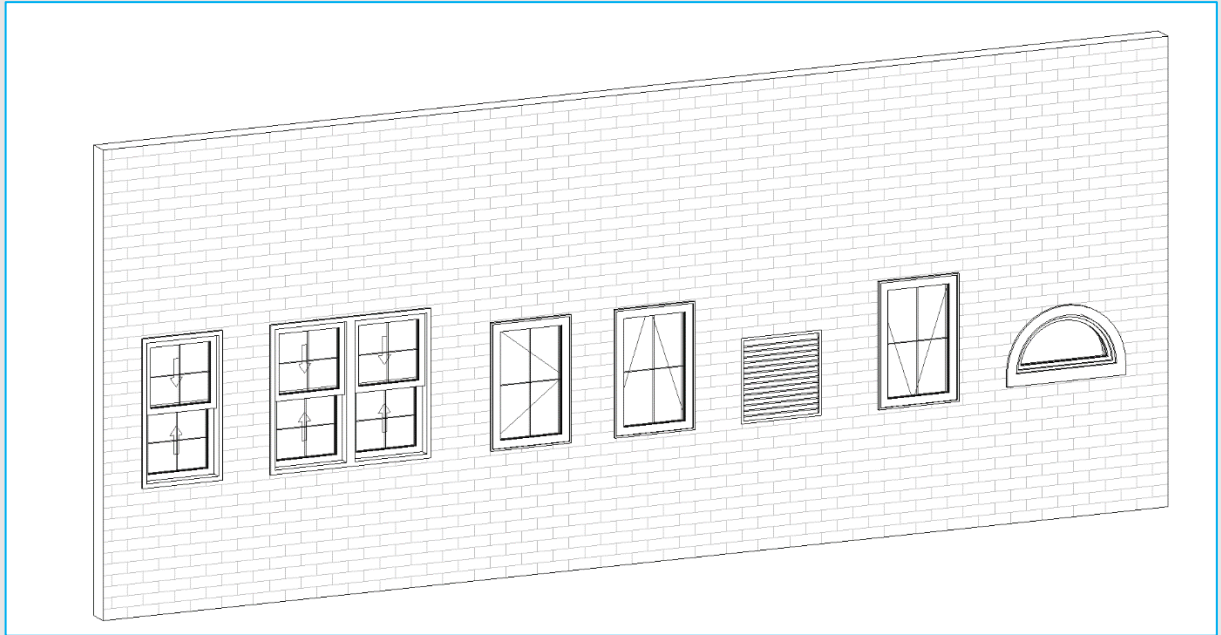


Figure # 21 - Window Types in 3D

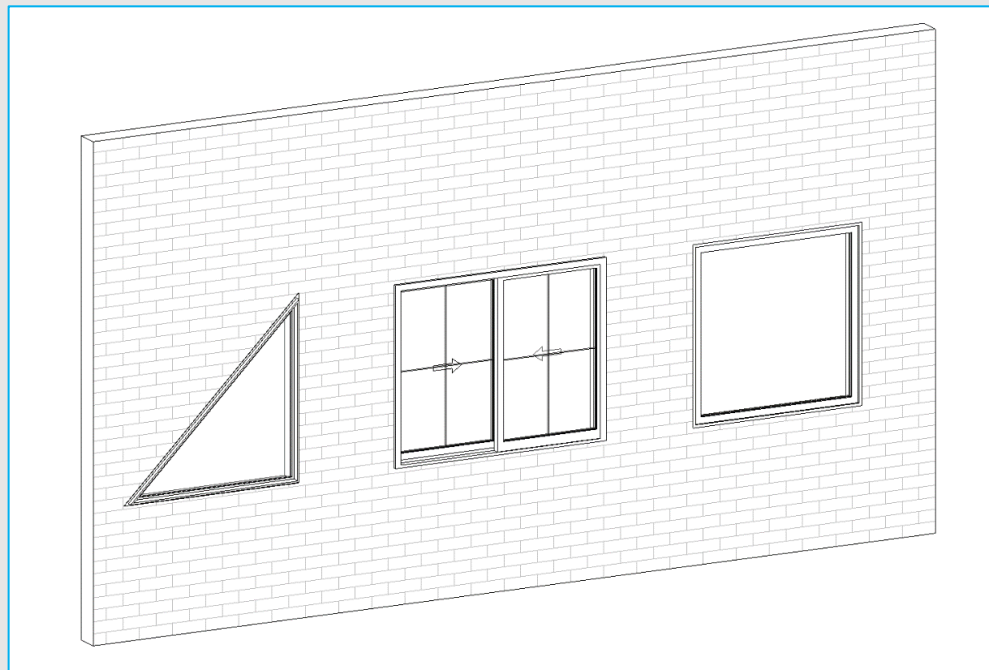


Figure # 22 - Additional Window Types in 3D

Stairs: Represented with single lines indicating the steps going up and down. Each set of stairs will have the corresponding label block.

- Stairs visible from four feet above the floor level descending are not shown and have a break-line.
- Stairs will meet their receiving level in 3D and have an associated generic railing generated.
- Stair tread depth and riser height is a default to match starting position and ending position. True number of risers is not represented in the model or the floor plans.

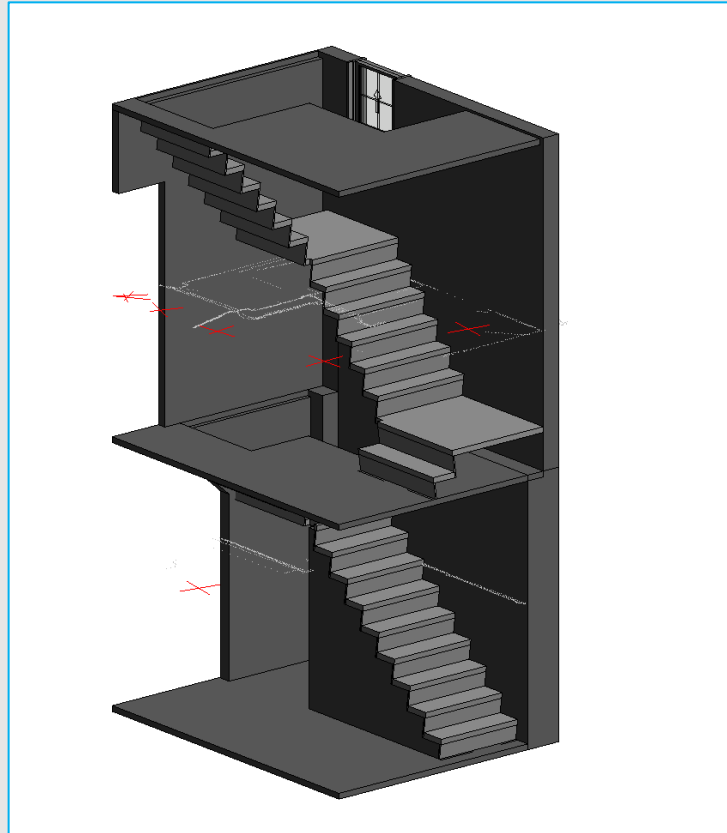


Figure # 23 - Multi-Floor Stair ISO

Ceilings: Ceilings are represented as flat. Ceiling dimensions are shown to the nearest 1" (25mm) increment. With 2" (51mm) generic Ceiling assembly.

Complex Ceilings: Provided a vertical wall that contacts the ceiling in combination with vertical scan capture, a Sloped, Peaked, Attic, or Tray ceiling type will be represented in Premium RVT files. Ceiling dimensions are shown to the nearest 1" (25mm) increment. With 2" (51mm) generic Ceiling assembly.

- Floating features, small bulkheads, and areas with no clear vertical data will not be represented.
- Tray ceilings will use a default one foot (1'-0") (305mm) dimension to indicate the depth.

Exterior Spaces: Generic two-inch floors representing the areas for exterior spaces (porches/patios/decks).

- Exterior Stairs/Ramps: Exterior Stairs and/or ramps will be represented in the Model and on the Floor Plan.
- Exterior Columns: External Columns that support the main structure will be represented in the model and on the Floor Plan.

Room Labels: Annotative room labels with varying sizes used to clearly indicate specific rooms.

Room Boundaries: Outlining edges of rooms primarily used for determining the area of the room.

- Invisible Dividers separate spaces so rooms best match the iGUIDE.

Room Areas:

- Room Areas are indicated for Major Rooms such as bedrooms, kitchens, living rooms, etc.
- Room Areas are not indicated for Minor Rooms such as hallways, closets, etc.
- Room Areas for spaces such as voids and stairs are not indicated.

Room Dimensions:

- Single dimensions annotating the longest width and longest length for rooms that have dimensions displayed in the iGUIDE.
- Room dimensions are annotated to the interior face of wall to interior face of wall.
- Room dimensions are shown for major rooms, matching what is displayed on the iGUIDE.

Room Heights:

- Flat Ceilings will contain a single vertical dimension appended to the Room Label.
- Unfinished Ceilings are measured to the underside of the floor joist.
- Sloped, Vaulted or Tray Ceilings will be denoted as "VAR."

Premium Objects: Premium objects, millwork, and counters. Outlined with a solid thin thickness line below four feet from the floor level, and a dashed thin thickness line if under the counter, similar to the iGUIDE. Objects used in the model match the objects used in the iGUIDE.

- Base counter height is set to a height of 3'-0". No custom heights will be provided.
- Upper Cabinets will be a generic model with a default 1'-0" depth, 2'-0" height and 4'-6" above the finished floor level.

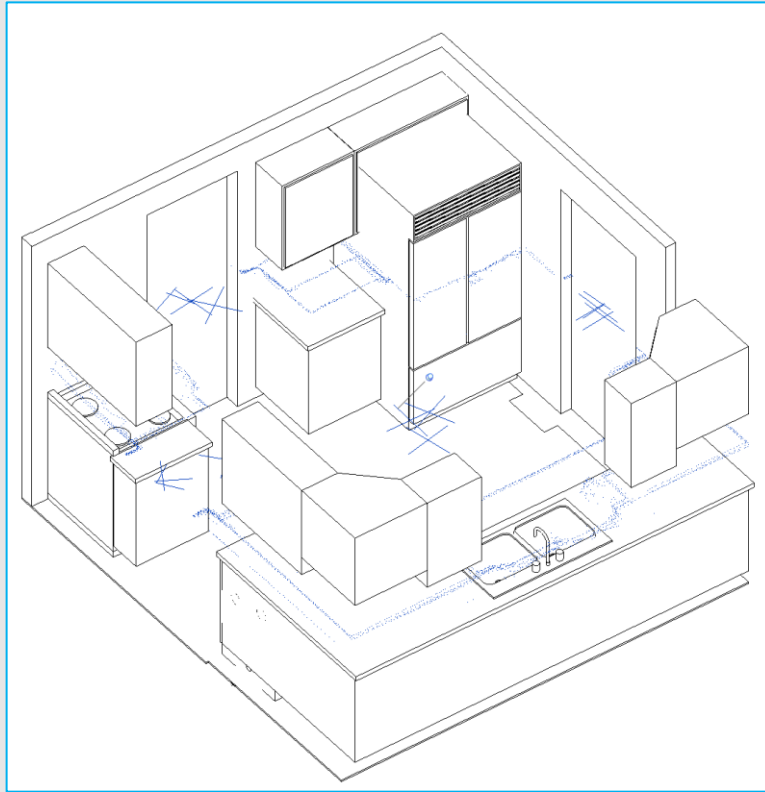


Figure # 24 - Premium Kitchen Items in 3D

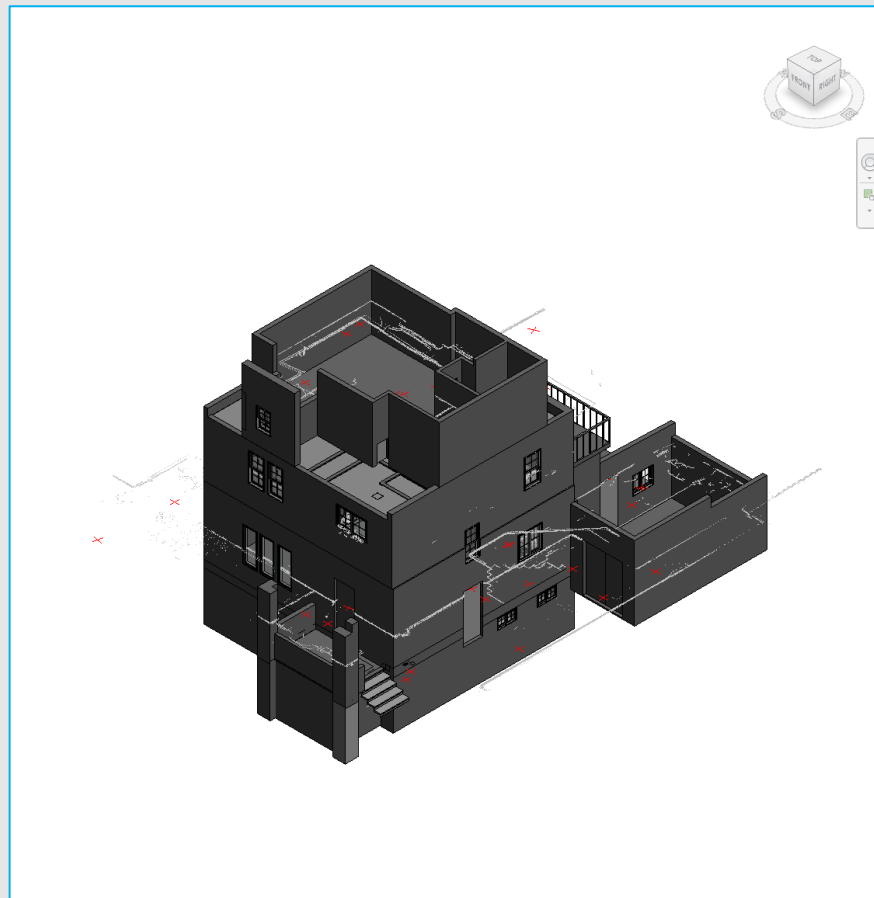


Figure # 25 - RVT Standalone Model

Model Comparison Matrix

	Premium
Included	<ul style="list-style-type: none"> ✓ 3D 2020 Revit file (.rvt). ✓ Wall Types & Placement ✓ Wall Sizes at ½" Tolerances ✓ Wall Placement at ¼" Tolerances ✓ Door Types & Placement ✓ Window Types & Placement ✓ Stairs ✓ Structural Elements (Columns as Basic Shapes) ✓ Floor to Floor Alignment ✓ Ceilings (Flat) ✓ Complex Ceilings (Sloped, Tray, Boxed) ✓ Ceiling Components (Surface Level Components)* ✓ Point Cloud from DXF file ✓ Exterior Spaces (Decks, Patios, Porches, etc.) ✓ Room Labels ✓ Room Areas ✓ Ceiling Heights ✓ Room Dimensions ✓ Premium Objects (Cabinets, Fixtures, Appliances, Floor Level Mechanical)
Not Included	<ul style="list-style-type: none"> ✗ Sloped Roofs (Residential)* ✗ Flat Roofs (Commercial)* ✗ Elevational Façade Materials (Cosmetic)* ✗ Wall Material/Assembly Details ✗ Floor Material/Assembly Details ✗ Ceiling Material/Assembly Details ✗ Roofing Material/Assembly Details ✗ Sections ✗ Project/Survey Coordinates ✗ MEP (Mechanical, Electrical, Plumbing) ✗ Site/Landscaping ✗ Structure such as Beams & Joists
<p>*Inclusions are dependent on their relevant Add-ons. For example, to have ceiling components listed in the ceiling plan deliverables appear in the model, the add-on needs to be requested. The Model Deliverable can be ordered as a standalone product but does not reflect the model showcased for the 3D CAD Package.</p>	

Additional Information

This section of the document provides additional information not contained within the core body of the deliverables above.

Data Interpretation – North America

Data Assumptions/Deviations: In the goal of providing a workable model and subsequent DWG files that has walls at appropriate thicknesses and locations, there will be some assumptions made that may result in deviations from the laser data. Accuracy is always a valuable deliverable, with these assumptions, the DWG file produced maintains its accuracy while also being easily modifiable for any uses. In the cases where the laser data proves to be more accurate, less assumptions will be made, and vice versa, if the laser data is of inadequate quality, more assumptions will be made.

Dimensional Lumber Assumptions: As stated in Interior Walls, typical wall thicknesses will utilize dimensional lumber increments and increase relative to the laser data but not be strictly governed by them. The data will be used as a reference with some discrepancies to ensure the consistency of interior wall thicknesses.

Exterior Wall Assumptions: To ensure the exterior face of all perimeter walls are aligned from floor to floor (with reference to the iGUIDE to determine if a wall is not aligned) the exterior wall thicknesses may deviate from the data provided. This ensures a clean, usable starting point that is aligned and easily editable for continuing the process of completing the file.

Data Interpretation – Outside North America

Wall Assumptions: As stated in Interior Walls, typical wall thicknesses will utilize dimensional lumber increments and increase relative to the laser data but not be strictly governed by them. Walls drawn for properties outside of North America will be drawn against the Point Cloud to the nearest ½" (10mm/13mm) whereas room dimensions will be measured to the nearest ¼" (5mm/6.5mm). Interior walls and exterior walls may not contain consistent uniform thicknesses.

Verticality & Alignment: To ensure wall measurements are to the nearest ½" (10mm/13mm) for interior walls & exterior walls, full floor to floor alignment may not match and cannot be guaranteed for the DWG files.

Complex Properties

Properties of unusual build/architecture may not be possible to provide. Even with an iGUIDE Camera System with detailed lidar capture/scan coverage, providing comprehensive information about complex building structures may not be feasible. While the technology enables precise measurements and mapping, the intricate designs, and functionalities of certain structures, may pose challenging in delivering reliable data.

Complex Properties may include but are not limited to, Yurts, Domes, Places of Worship, Theatres, Stadiums, Arenas, Industrial Facilities, etc. Complex Properties, if completed, may contain limited details. iGUIDEs of non-building structures such Planes, Train & Automobiles will not be provided.